

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number
WO 2004/045774 A1

(51) International Patent Classification⁷: B04B 5/02, 15/02

(21) International Application Number:
PCT/SE2003/001781

(22) International Filing Date:
18 November 2003 (18.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0203413-0 19 November 2002 (19.11.2002) SE

(71) Applicant (for all designated States except US): ALPHA-
HELIX AB [SE/SE]; Uppsala Science Park, S-751 83 Upp-
sala (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ANDERSSON.

Lelf [SE/SE]; Blåmesvägen 6, S-597 32 Arvidaberg (SE).
MALMQVIST, Mats [SE/SE]; Hurligs Gata 63, S-754
39 Uppsala (SE).


(74) Agents: STRANDIN, Heléne et al.; Bergensträhle &
Lindvall AB, Box 17704, S-118 93 Stockholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, GR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM).
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE).

[Continued on next page]

(54) Title: DEVICE AND ROTOR MEANS THEREFOR

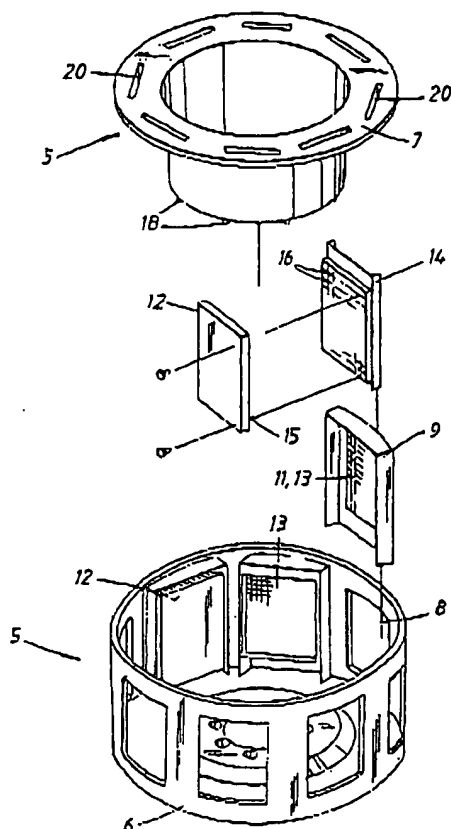

(57) Abstract: The invention relates to rotor means (5) for centrifuging reaction vessels containing reaction mixtures in a device for asymmetric heating and cooling of reaction mixtures during centrifugation. The rotor means (5) comprise/s at least one fan blade (18), which force ambient gas to pass the reaction mixtures. The invention also relates to a device for asymmetric heating and cooling of reaction mixtures during centrifugation comprising said rotor means (5).

WO 2004/045774 A1

10/535137

Rec'd PPTO 17 MAY 2005

WO 2004/045774 A1



SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

BEST AVAILABLE COPY

DEVICE AND ROTOR MEANS THEREFOR

The present invention relates to rotor means for centrifuging reaction vessels containing reaction mixtures
5 in a device for asymmetric heating and cooling of reaction mixtures during centrifugation and a device for asymmetric heating and cooling of reaction mixtures during centrifugation having such a rotor means.

10 Technical background

The applicant has developed a method and an apparatus for rapid homogenisation and mixing of reaction mixtures with regard to temperature and chemical concentration, i.e. to
15 subject the reaction mixtures to asymmetric heating and cooling while the reaction mixtures are centrifuged.

When using said apparatus, reaction vessels including the reaction mixtures, i.e. the complete reaction mixture or a
20 subset of this, are placed in a rotor of a centrifuge with the closed end directed downwards, outwards or otherwise according to standard practice for centrifuging the reaction vessels in question. The centrifuge is then started, i.e. the engine which brings the rotor to spin is
25 switched on.

When the rotor has accelerated to the chosen gravitational force, the rotation is kept at constant speed. A heating source is now switched on leading to an increased
temperature in the reaction mixtures in an asymmetric
30 manner so that a temperature difference is created in the reaction mixtures. Preferably, the heating acts directly on a portion of the reaction mixtures contained in the reaction vessels. At the same time the reaction mixtures

are subjected to cooling by means of cooling the walls of the reaction vessels.

This asymmetric heating and cooling during centrifugation creates a rapid, controlled flow in the reaction vessels
5 that thoroughly mixes the reaction mixtures with respect to both temperature and chemical concentration. This extremely rapid mixing is tentatively called superconvection.

10 **Summary of the invention**

Accurate, fast and effective cooling of the reaction mixtures is important in order to decrease process time and the quality of the outcome, for example to minimize or
15 counteract unwanted side reactions.

The solution to the problem of creating effective cooling is provided by novel rotor means having the features according to claim 1 and by a novel device for asymmetric
20 heating and cooling of reaction mixtures during centrifugation having rotor means according to the present invention.

By the provision of at least one fan blade in the rotor
25 means, ambient gas is forced to pass the reaction mixtures, whereby, for example, a more effective cooling of the reaction mixtures may be performed since a larger amount of ambient gas will pass the reaction mixtures than if the reaction mixtures would only be subjected to the
30 ambient gas by the rotational speed of the rotor. The function of the fan blade/-s may be compared with the function of a centrifugal pump.

In order to effectively perform the cooling of the reaction mixtures, the ambient gas could be conducted through a conducting passage.

- 5 According to a preferred embodiment the rotor means comprises a base portion and a lid portion, forming an inner space between these two portions. Within this inner space the fan blade/-s are provided.
- 10 Preferably the lower portion of the rotor means, for example but not necessarily the base portion, is provided with at least one through hole to let the gas into the inner space, or more precisely, the gas will be drawn into the inner space by the performance of the rotating fan
- 15 blade/-s in the inner space. Preferably the upper portion of the rotor means, for example the lid portion but not necessarily, is provided with at least one through hole to let the gas, which is drawn in and forced through the inner space, out of the inner space.

20

The fan blade/-s may for example be arranged on the inside, i.e. the side that faces the inner space, of the lid portion or on the inside of the base portion.

- 25 In order to increase the throughput of the device and/or process, it would be an advantage to be able to handle more reaction mixtures at the same time. One way of doing this is to handle reaction mixtures arranged in a parallel format, for example in at least one microtitre plate.
- 30 Microtitre plates are available in different formats, such as the traditional 96 well format, and e.g. the more dense 384 well format, as well as the 1536 well format.

Using microtitreplates, the benefits of the invention become accentuated. If only the airflow caused by the rotation velocity is used to cool the reaction vessels containing the reaction mixtures, a problem of non-uniform cooling of the reaction mixtures will appear. The airflow will hit the row of reaction vessels in the front, in relation to the direction of movement of the microtitre plate, whereafter, due to natural flow, the airflow will be diverted outside the closed ends of the reaction vessels of the microtitre plate towards the back of the plate.

Thanks to the present invention it becomes possible to evenly cool all the reaction mixtures in the microtitre plate by forcing ambient gas to pass in between the wells containing the reaction mixtures by means of at least one fan blade and at least one gas conducting passage provided in the rotor means.

The gas may be ambient air or any gas supplied to the rotor means and its surroundings. The air or gas may be cooled by cooling means.

Yet another problem that arises in particular when reaction vessels in the parallel format, e.g. microtitre plates, are used is that of deformation of the reaction vessels. Under the high centrifugal forces and elevated temperatures, the microtitreplates are frequently deformed. According to conventional techniques, this is avoided by the provision of supporting elements shaped as a negative print of the microtitreplate. In other words, the microtitreplate is placed in a solid support having wells corresponding to each reaction vessel or well of the

known art, the reaction vessels or wells are not accessible for analysis, nor for effective heating and cooling.

5 This problem is solved by means of the arrangement according to the present invention provides a highly beneficial solution to the problem of microtitreplate deformation. The base portion of the rotor which together with the lid portion define an inner space through which
10 ambient air is forced, does simultaneously constitute a support for the microtitreplates without obstructing the airflow and thus allowing for efficient cooling. By providing a transparent base plate, the reaction vessels are available for analysis if desired. Optionally, the
15 base plate may be provided with indentations corresponding to the apices of the reaction vessels.

It should be noted that the function of the rotor means according to the present invention may be advantageous not
20 only during cooling but also during keeping s constant temperature in the reaction mixtures, e.g. incubation.

Short description of the drawings

25 The present invention will be described by way of exemplifying embodiments in connection with the appended drawings.

30 Fig. 1 illustrates in a perspective view an inner portion of a device for centrifuging reaction mixtures according to a preferred embodiment of the present invention.

Fig. 2 illustrates in an exploded diagram rotor means according to a preferred embodiment of the present invention.

5 Fig. 3 illustrates in a view from underneath a portion of the rotor means having fan blades.

Fig. 4 illustrates in a cross section view the rotor means of the present invention.

10

Fig. 5 illustrates a close up view of the rotor of fig. 5 with a microtitre plate mounted.

15 Fig. 6 illustrates in a cross section view a device according to a preferred embodiment of the present invention provided with cooling means. It also illustrates the flow of the gas during cooling.

20 Fig. 7 illustrates the device in fig. 7 and the flow of the gas during a constant temperature phase.

Detailed description of preferred embodiments

25

Fig. 1 illustrates an inner portion of a preferred embodiment of a device for asymmetric heating and cooling of reaction mixtures during centrifugation provided with rotor means according to the present invention. It
30 comprises a bottom plate 1 and a substantially cylindrical wall 2 made up by wall portions 4.

Within the cylindrical wall 2 rotor means 5 (only

centre by means of some kind of bearing and is for example connected to rotating means (not shown), such as a motor, preferably provided underneath the bottom plate 1.

- 5 In fig. 2 the rotor means 5 and parts to be placed therein are shown in an exploded view. The rotor means 5 comprises a base portion 6 and a lid portion 7. The base portion 6 is provided with side recesses 8 and in connection with each side recess 8 a guide portion 9 is mounted.

10

The guide portion 9 is also provided with a side recess 10, which is covered by a plate 11 of glass or another heat transferable material.

- 15 The above mentioned microtitre plate 12, comprising reaction mixtures, is mounted in a cassette 14, preferably with the wells 15 of the microtitre plates 12 protruding through adapted holes 16 in the cassette 14. The cassettes 14 may be adapted for different kinds of microtitre plates 12 or different cassettes 14 may be provided for different kinds of microtitre plates 12 but all the cassettes 14 are adapted to fit into the guide portions 9. The closed ends of the wells 15 of the microtitre plates 12 may rest against the plate 11 in the guide portion 9, at least during centrifuging.
- 20
- 25

The lid portion 7 is mounted on top of the base portion 6. Thus, an inner space 17 is formed between the base portion 6 with its mounted guide portions 9 and the lid portion 7, see fig 4. In the preferred embodiment fan blades 18 are arranged at the bottom of the lid portion 7 at the side which faces the inner space 17.

30

The fan blades 18 will have the same kind of function as a centrifugal pump when the rotor means 5, and thereby the fan blades 18, rotate. The fan blades 18 are preferably arranged so that when they rotate they draw ambient gas
5 into the inner space 17 through holes 19 arranged in the base portion 6, see arrows in fig. 5, and force the ambient gas through the inner space 17 and out of holes 20 in the lid portion 7.

10 The holes 16 in the lower portion of the rotor means 5 are preferably arranged close to the rotational centre and the holes 20 in the upper portion of the rotor means 5 are preferably arranged along the cassettes 14, on the outsides thereof.

15

Since the only way out for the forced flow of gas is through the holes 20 and the fact that the cassettes 14 are in close contact with the lid portion 7 the gas will be forced underneath the cassettes 14 and in between the
20 wells 15 of the microtitre plates 12, which wells 15 are positioned between the plates 11 covering the side recesses 10 of the base portion 6 and the cassettes 14, and up and out of the holes 20. This is shown by arrows both in fig. 5 and fig. 6. In other words, a conducting
25 passage is provided to conduct the forced flow of gas to pass the reaction mixtures.

It is conceivable to provide baffles (not shown) in front of the lowest row of wells 15 of the microtitre plate 12
30 to disturb the forced gas flow so that this row will not directly be hit by the gas flow, which is forced to pass underneath the cassette 14.

If the microtitre plates 12 are provided with upper and lower side edges that could obstruct the gas flow between the wells 15 thereof, these upper and lower side edges will be fully or partially removed. The direction is
5 related to the position when mounted in the rotor means 5.

Outside of the substantially cylindrical wall 2 a burst wall is provided for safety reasons, and having insulation provided there between. In fig. 7 an embodiment of the
10 device according to the present invention is illustrated, which is provided with cooling means 24. The burst wall, cylindrical wall 2 and the rotor means 5 are provided in the upper portion of a box like housing 23, which
comprises an openable lid 25. The lid 25 is preferably
15 sealed along its outer rim. For example the cooling means 24 may be a compressor cooling arrangement.

Gas canals and valves are provided in the housing 23, see the arrows showing the flow through the housing 23 during
20 a cooling phase in the process in fig. 7. In the bottom of the cooling means 24 at least one inlet valve 26 is provided that in open position take in ambient air to be cooled by the cooling means 24. In the lid 25 at least one outlet valve 27 and at least one transfer valve 29 is
25 provided. The transfer valve 29 leads into an outlet canal in the lid, which leads to the outlet valve 27.

When the outlet valve is open the cooling gas, in this embodiment ambient air, may leave the housing 23 and at
30 the same time a recycling canal is closed by the outlet valve 27. During a constant temperature phase of the process, see fig. 8, the outlet valve 27 is closed and the gas cannot leave the housing 23 but instead the recycling

canal is open so that the gas can be recycled into the cooling means 24. The inlet valve 26 is then closed.

Between the cooling means 24 and the rotor means 5 a
5 centre valve 28 is provided. During the two above mentioned process phases the centre valve 28 is open to let gas into the rotor means 5 from the cooling means 24.


CLAIMS

1. Rotor means for centrifuging reaction vessels
5 containing reaction mixtures in a device for asymmetric heating and cooling of reaction mixtures during centrifugation, **characterised in** that the rotor means (5) are adapted for centrifuging reaction mixtures arranged in at least one microtitre plate (12) and
10 comprise/-s at least one fan blade (18), which force ambient gas to pass the reaction mixtures.
2. Rotor means according to claim 1, wherein at least one gas conducting passage (17) is arranged in the rotor
15 means (5) to conduct the gas to pass the reaction mixtures.
3. Rotor means according to claim 1 or 2, wherein the rotor means (5) comprise/-s a base portion (6) and a
20 lid portion (7), in between which an inner space (17) is formed wherein the fan blade/-s (18) are arranged.
4. Rotor means according to claim 1, 2 or 3, wherein the lower region of the rotor means (5) is provided with at
25 least one through hole (19) through which the gas may be drawn.
5. Rotor means according to any one of the previous
30 claims, wherein the upper region of the rotor means (5) is provided with at least one through hole (20) through which the gas is let out.

6. Rotor means according to claim 3, wherein the fan blade/-s (18) are arranged at the inside of the base portion (6) of the rotor means (5).
- 5 7. Rotor means according to claim 3, wherein the fan blade/-s (18) are arranged at the inside of the lid portion (7) of the rotor means (5).
- 10 8. Rotor means according to claim 2, wherein the at least one gas conducting passage is arranged to conduct the gas between the reaction mixture-containing wells (15) of the microtitre plate (12).
- 15 9. Rotor means according to any one of the previous claims, wherein a plate (11), is arranged to support the at least one microtitre plate.
- 20 10. Rotor means according to claim 9, wherein the plate (11) has indentations corresponding to the apices of the wells of the microtitreplate.
11. Rotor means according to any one of the previous claims, wherein the gas is ambient air.
- 25 12. Rotor means according to any one of the previous claims, wherein cooling means (24) is provided to cool the ambient gas.
- 30 13. Device for asymmetric heating and cooling of reaction mixtures during centrifugation, **characterised in** that it comprises rotor means (5) according to any one of the previous claims.


1/5

Fig. 1

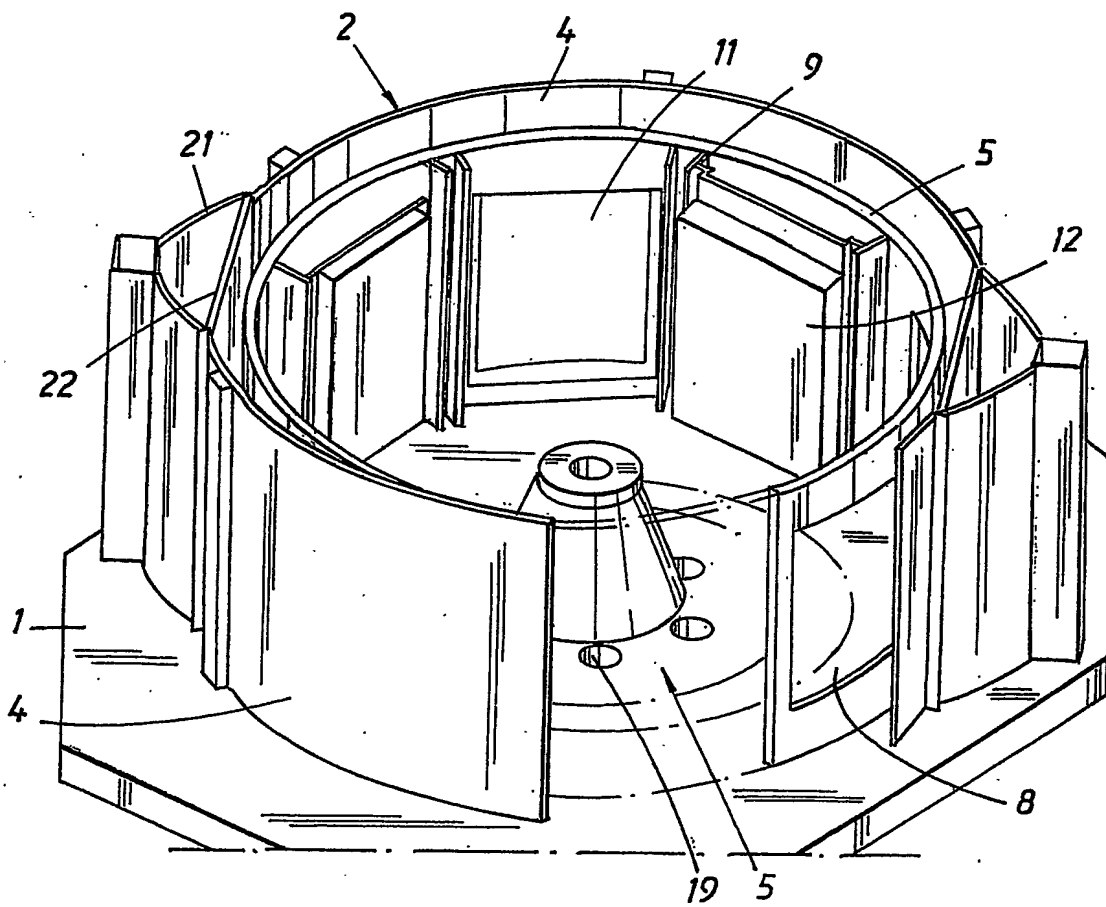


2/5

Fig. 2

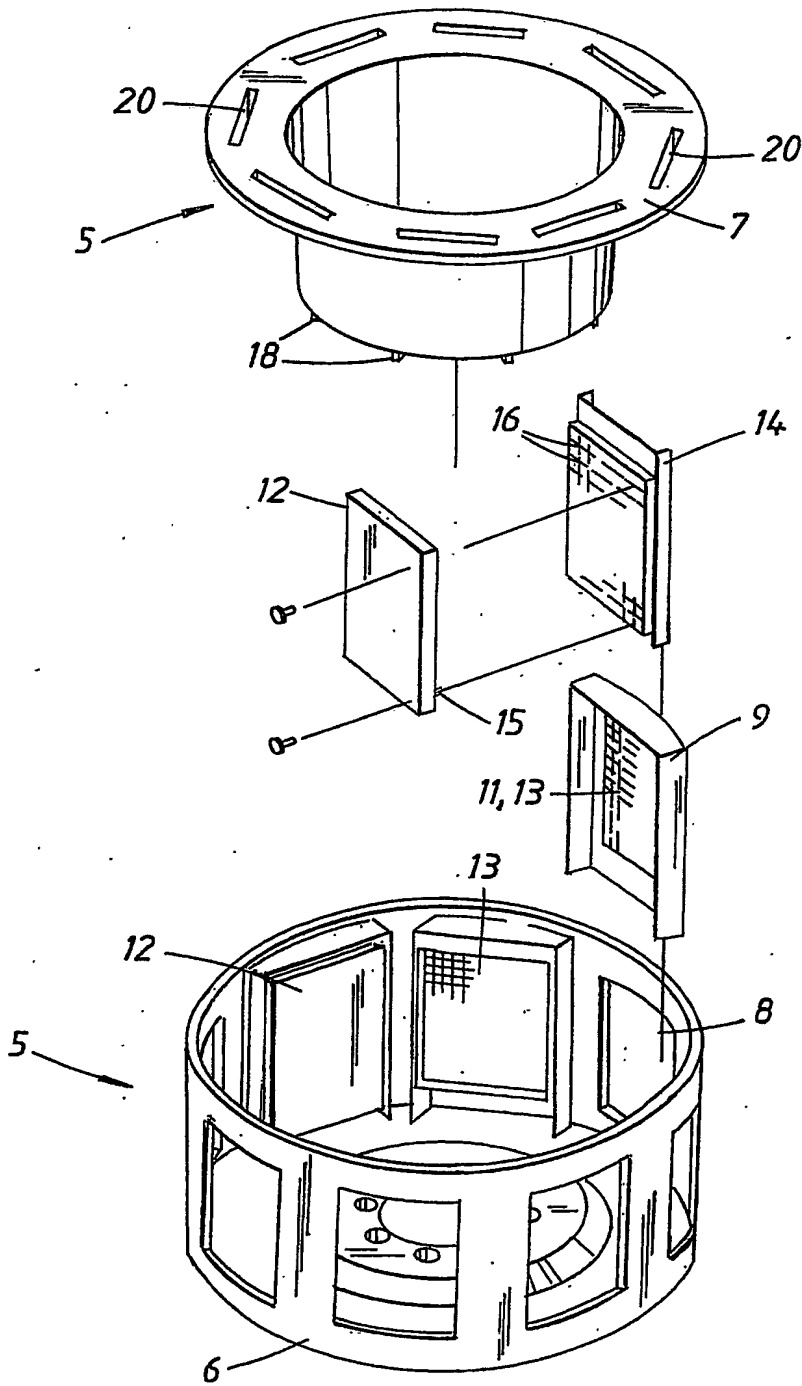

3/5

Fig. 3

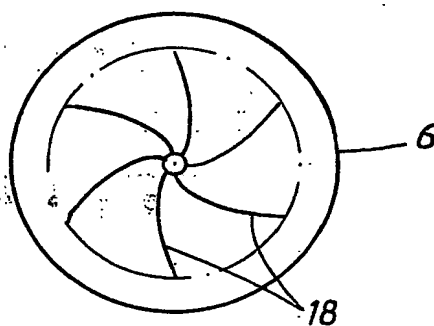

4 / 5

Fig. 4


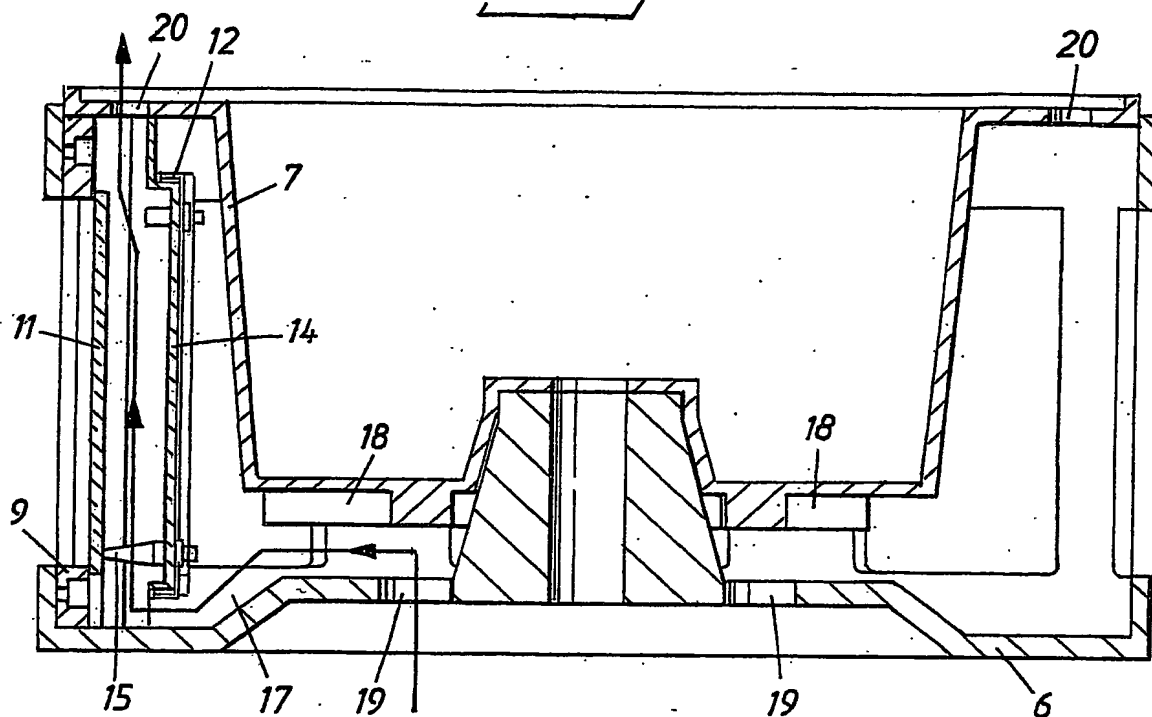


Fig. 5

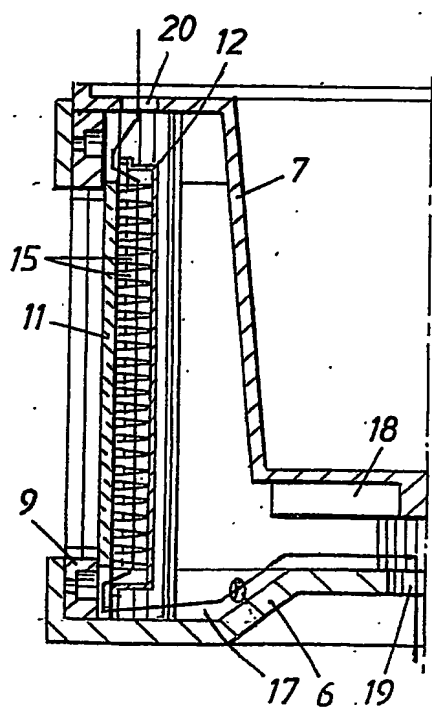

5/5

Fig. 6


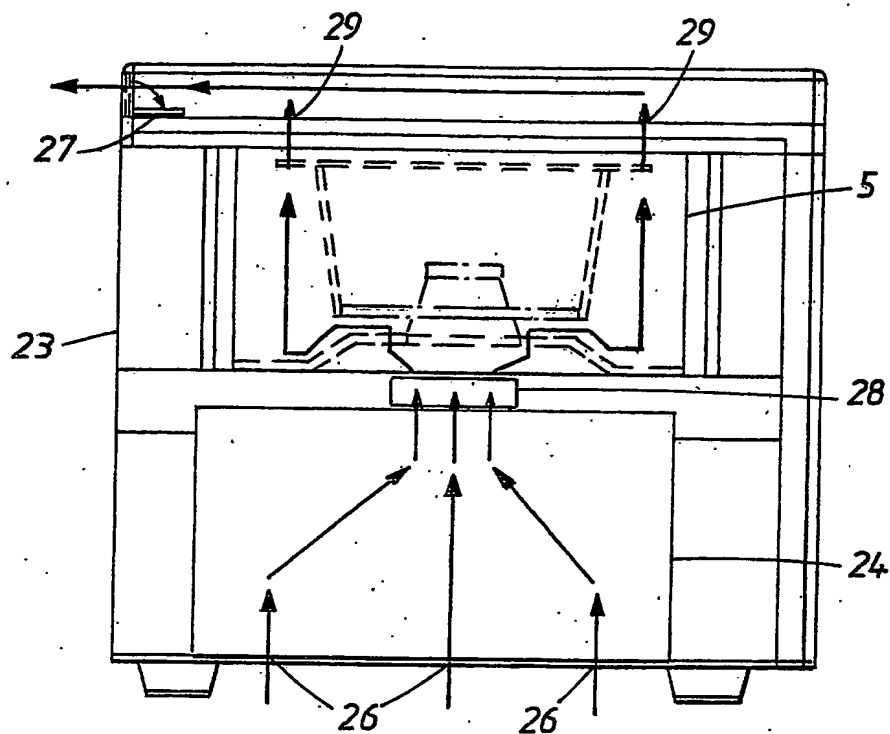


Fig. 7

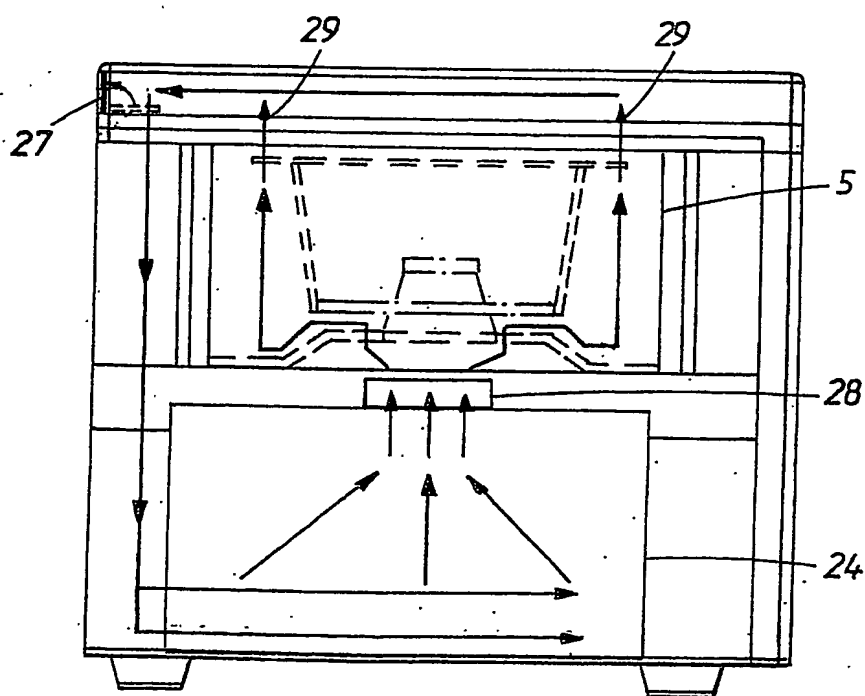

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001781

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B04B 5/02, B04B 15/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0058013 A1 (ALPHAHELIX AB), 5 October 2000 (05.10.2000), figures 1-7, claims 1-16, abstract -- -----	1-13

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 February 2004

Date of mailing of the international search report

16 -02- 2004

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Andersson/MP
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

24/12/2003

International application No.

PCT/SE 2003/001781

WO	0058013	A1	05/10/2000	AU	766869	B	23/10/2003
				AU	4159100	A	16/10/2000
				AU	4816399	A	05/01/2000
				CA	2366732	A	05/10/2000
				CN	1125687	B	29/10/2003
				CN	1352576	T	05/06/2002
				DE	19983299	T	10/05/2001
				EP	1173284	A	23/01/2002
				GB	0029928	D	00/00/0000
				GB	2357198	A,B	13/06/2001
				JP	2002539937	T	26/11/2002
				PL	344836	A	19/11/2001
				SE	9901104	D	00/00/0000
				US	6373723	B	16/04/2002
				CA	2360786	A	03/08/2000
				EP	1146840	A	24/10/2001
				JP	2002535086	T	22/10/2002
				SE	9902378	D	00/00/0000
				US	6568002	B	27/05/2003

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.